

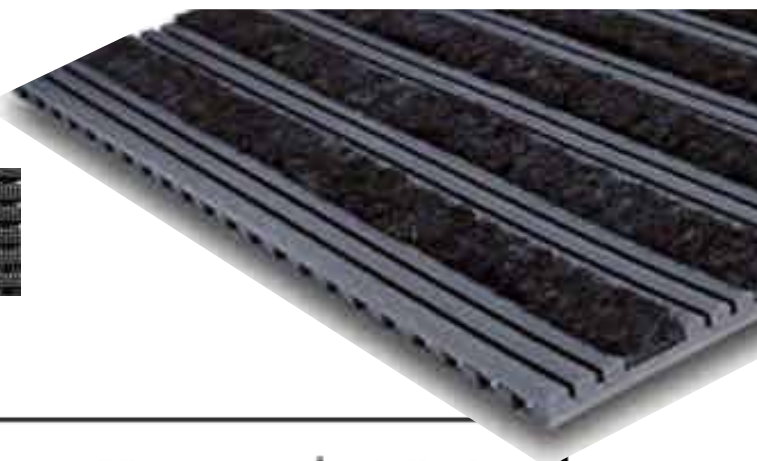


Pro Entry

PANEL



INSTALLATION OPTIONS

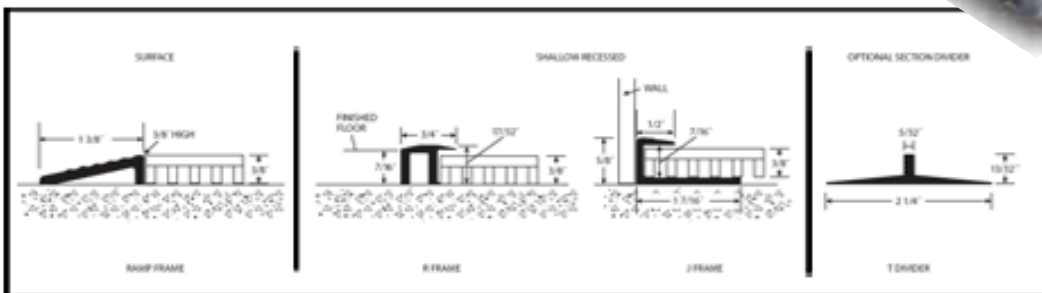

SIZES

Roll: 36" x 30', 48" x 30'

Custom: 36" and 48" widths by custom lengths to 30'

Custom: *Widths may vary slightly

Specs

Material: Recycled vinyl with nylon inserts in a drop-thru grid

Style: Embossed anti-slip surface with alternating premium Polyamide nylon fiber inserts (6.6)

Overall Thickness: 3/8"

Backing: Drop-thru

LEED: Possible LEED-NC credits: MR Credit 4 (1-2 points), MR Credit 5 (1-2 points), IEQ Credit 5 (1 point)

Maximum Rolling Load: 1,200 per wheel

Recycled Content: Gray base: 27.52% pre-consumer and 1.4% post-consumer; Black base: 86% consumer and 1.4% post-consumer

Additional Specs: ASTM E648: Class 1

Features

Dual strip design scrapes off debris and absorbs moisture

Extremely durable construction withstands heavy traffic

Drop-thru design traps dirt and moisture below the surface, reducing tracking

Common Uses: Supermarkets, retail stores, malls, office buildings, schools, hospitals, sports arenas, airports

Easily cut on site to any angle, arc, or shape

Stable - conforms to uneven sub-floors

Quiet - eliminates noise and clatter common with aluminum roll-up mats

Anti-slip surface for indoor applications; ADA compliant


Additional insert options available

T section divider is optional for wheeled traffic applications

Schluter frame option available




Blue



Brown



Charcoal
(standard
insert color)



Rust



Forest Green



Gray

Actual colors may vary from your monitor.

	(Surface) Ramp Frame	(Recessed) R or J Frame
• Depth-grille only	3/8"	3/8"
• Depth-grille & frame	3/8"	R: 7/16" J: 5/8"

ProformTM
www.proformmat.com
888-331-3100