



ProformTM
Entry Matting Systems

SPORT TILE

Interlocking



FEATURES

- Superior performance tiles will never cup or bow
Shock absorbent, spike and blade resistant
- Glueless installation with reversible interlocking tiles
- Even color distribution and state of the art precision cut edges provide a seamless look
10 Year Warranty
- **Common Uses:** Cafés/Juice Bars, Cardio-Training, Health Clubs, Ice Arenas, Lobbies, Locker Rooms, Ski Areas, Strength Training

SPECIFICATIONS

Material: Black recycled rubber with EPDM colored granules—10% and 30% intensity

Tile Size:

Square Edge Tile: 24"x 24"

Interlocking Tile: 24"x 24"

Custom Sizes: Consult our Product Specialists for assistance.

Weight: Varies by thickness

Thickness:

Square Edge Tile: Approx. 4 mm, 6 mm, 8 mm, 10 mm and 12 mm

Interlocking Tile: Approx. 8 mm, 10 mm and 12 mm

Slip Resistance: (ASTM D2047) 1.04 dry and 1.05 wet

Critical Radiant Flux: (ASTM E648) Class 2: 0.22 - 0.44 w/cm²


Chemical Resistance: (ASTM F925) Excellent

Additional Specs: Custom logos, reducer


Recycled Content: Varies by color and EPDM intensity.

Please contact our Product Specialists for more information

10% INTENSITY

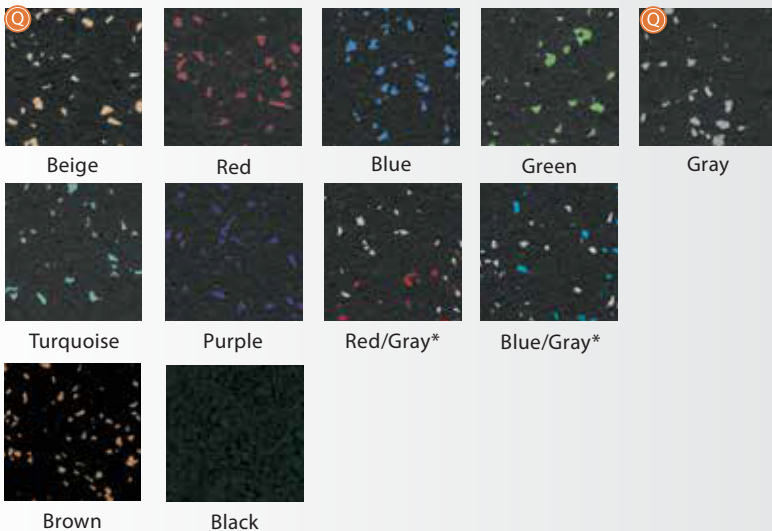

30% INTENSITY

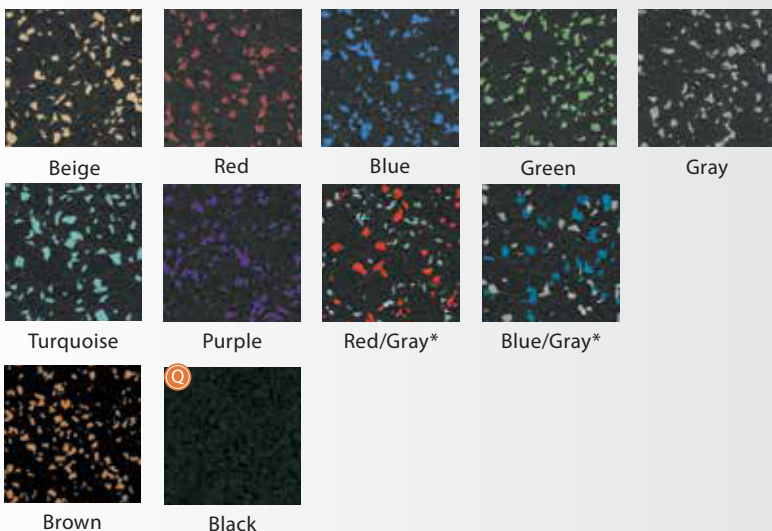

Possible LEED Credits

IEQ Credit 4.1 (1 point)
IEQ Credit 4.3 (1 point)
MR Credit 4 (1-2 points)
MR Credit 5 (1-2 points)

* Minimum quantities may apply

